




Chrysler 45RFE/545RFE 4th Clutch 99-On PowerPack® - Stage 3

ALTO PART # 128758C

Alto # 128758C POWERPACK® CONTENTS:

- (4) 128704A200 G3 Friction Plates
- (4) 128705-157PS Performance Steel Plates
- (1) 128765-500 Pressure Plate

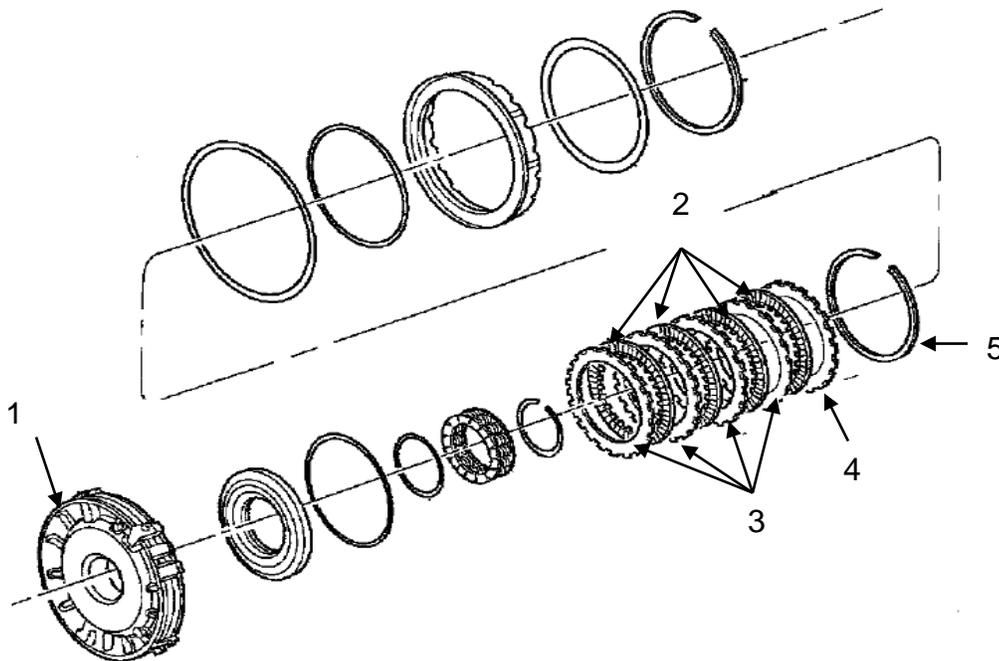

INSTALLATION INSTRUCTIONS

Stack-up is same as OE:

Install the Alto G3 frictions (4) and Performance steel plates (4), starting with a steel plate and ending with a friction plate into the 4C housing (1)

Install the top pressure plate (4)

Install the Flat 4C selective snap-ring (5) into the 4C housing

Check clutch pack clearance using a feeler gauge in four places between the Pressure plate and the snap ring. Clearance should be 0.770 to 1.390mm (.030" to .055")

Adjustment made by selective snap rings available from dealer.