




GM 6L80E 06-On 3-5 Reverse Clutch PowerPack®

Instruction Sheet

3 – 5 – Reverse Clutch PowerPack® - GM 6L80E Alto Kit # 195757

CONTENTS OF THIS KIT INCLUDE:

Qty	Part #	Description
7	195743A183	Red Eagle® External Spline Frictions Plates (1.83mm / .072")
7	195742A183	Red Eagle® Internal Spline Frictions Plates (1.83mm / .072")

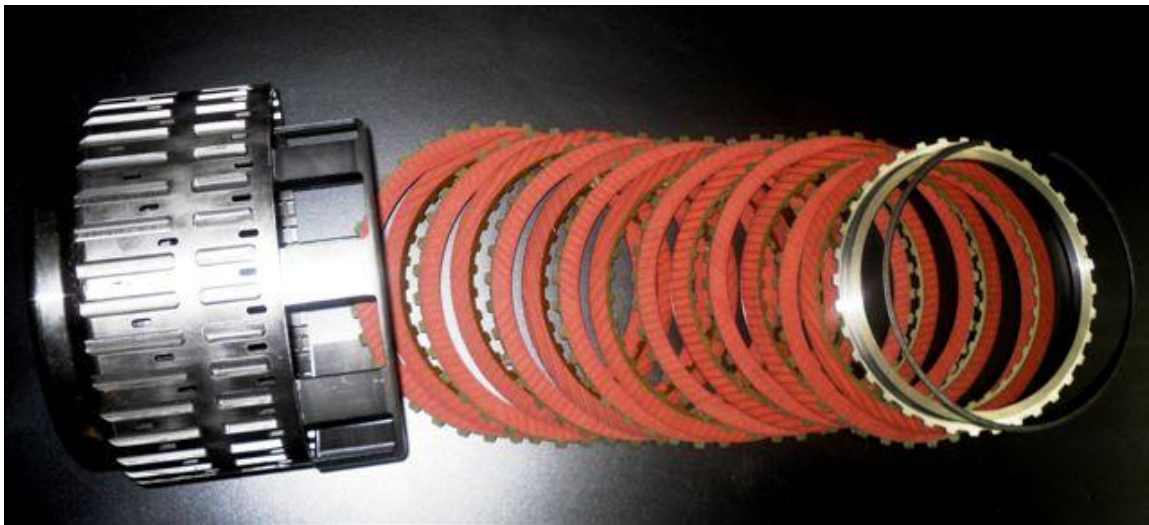

Installation:

3-5-Rev: 4 Friction Drum

Install the cushion spring that rides on the apply piston. Then install an externally splined friction plate with the friction lining facing up followed by an internally splined friction plate with the friction lining facing up. Continue stacking external and internal friction plates ending with an internal splined plate, all of the friction plates must have the lining facing up or the clutch will fail. (5 internal and 5 external plates) Install pressure plate and snap ring.

3-5-Rev: 5 Friction Drum Remove the cushion spring that rides on the apply piston. Start the stack-up with an externally splined friction plate with the friction lining facing up. Continue stacking external and internal friction plates ending with an internal splined plate, all of the friction plates must have the lining facing up or the clutch will fail. (7 internal and 7 external plates) Install pressure plate and snap ring.

Air-check the assembly several times to seat the stack-up.

Always pre-soak the frictions in the type of ATF recommended by the OE for at least 30 minutes.

Check clutch pack clearance between the pressure plate and the top friction plate in 3 different locations, clearance should be .040" to .070" (1.06 – 1.78 mm).